




COMBIVERT R6

LINE REGEN SYSTEMS UP TO 1000 kVA

EN

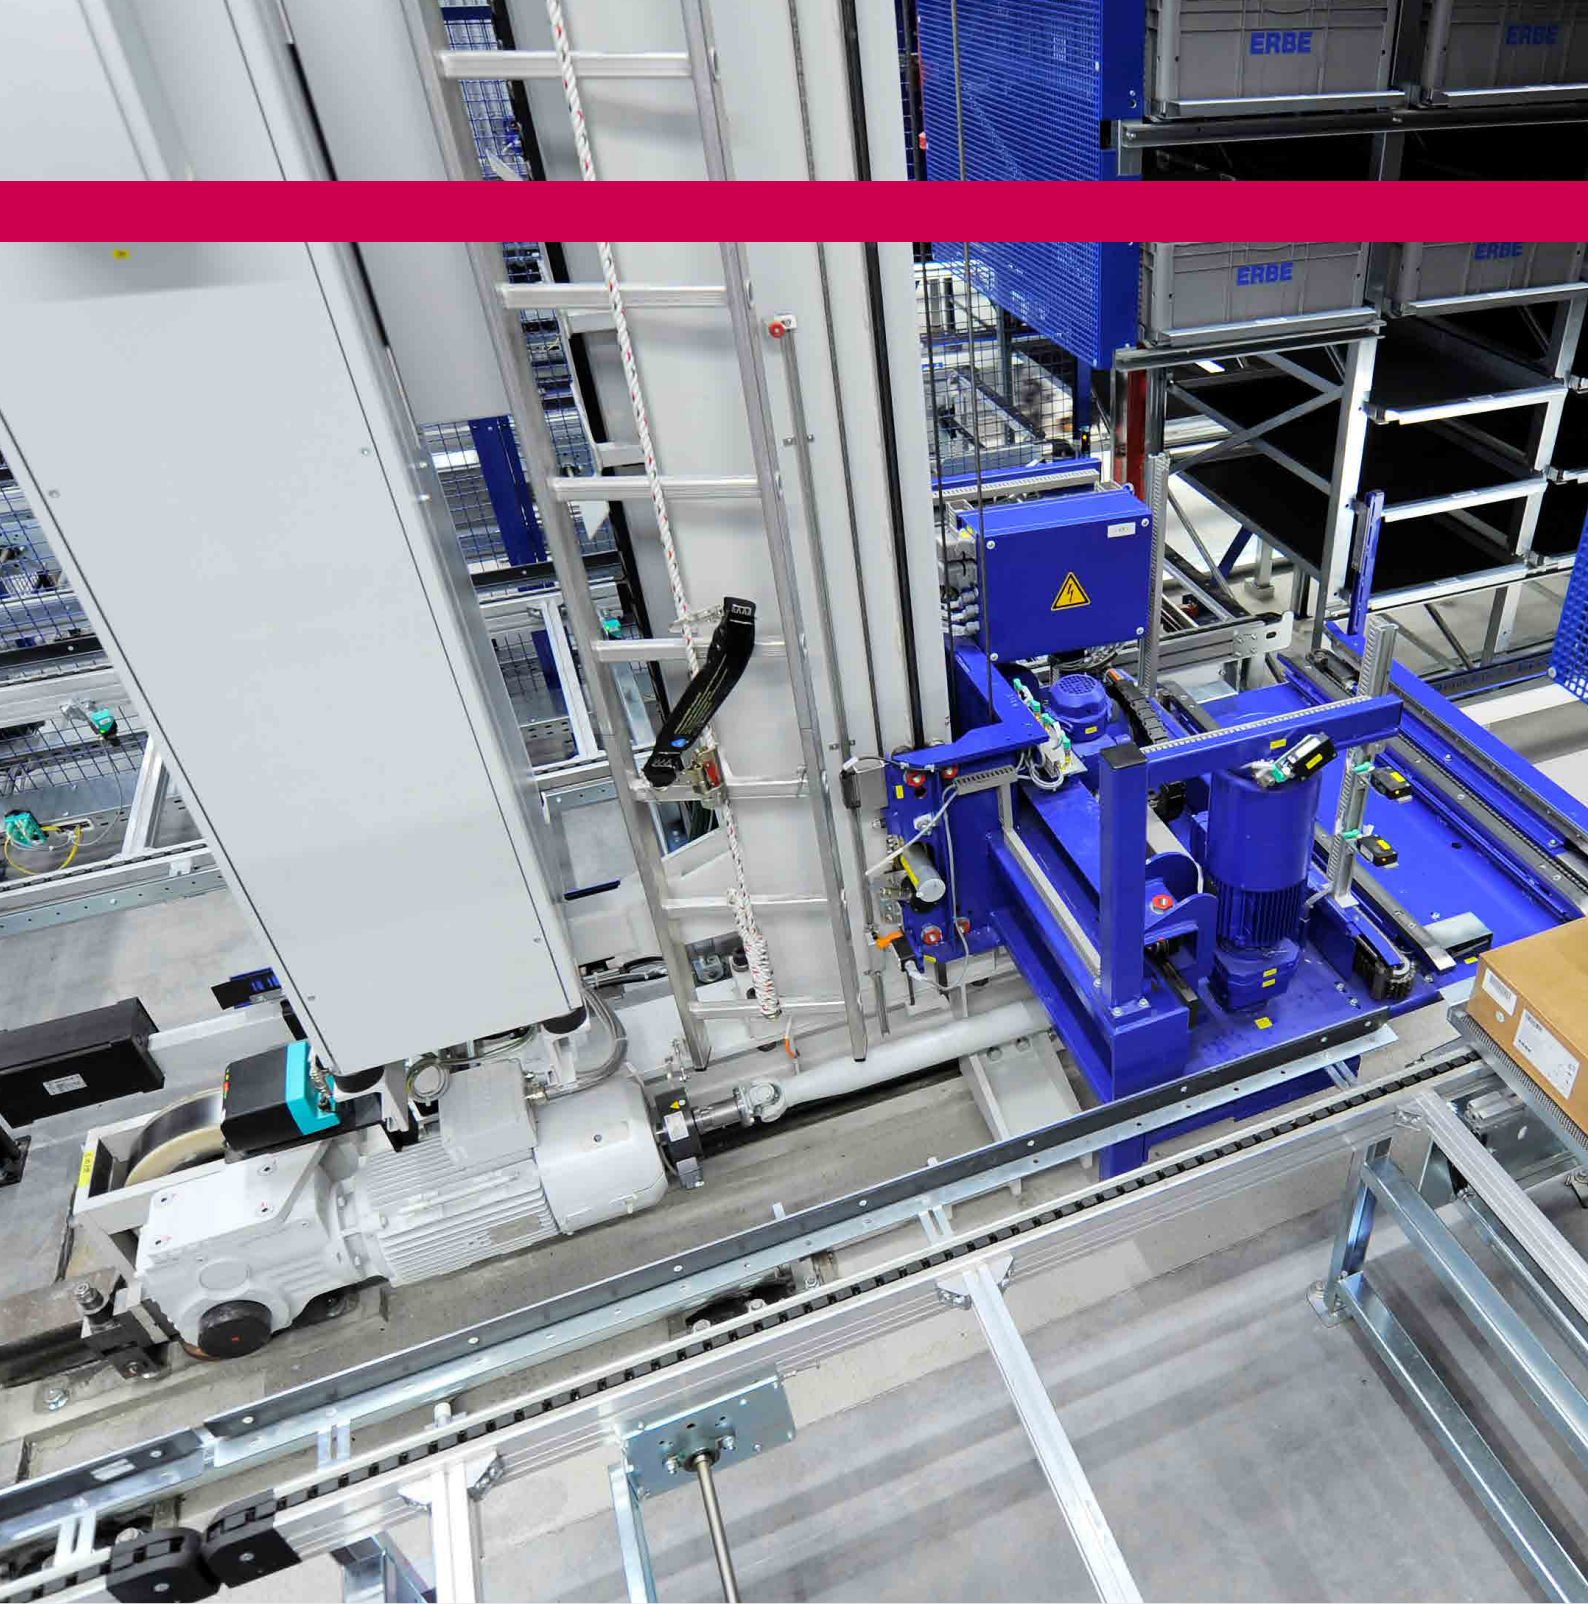

CONTENTS

PAGE

Energy efficiency	2
Applications	3
Functionality	4
NCM - Natural Current Modulation	5
Technical data	6
Addresses	8

PHILOSOPHY

Traditionally excess kinetic energy was dissipated through friction or a braking device (mechanical or electrical), most commonly a braking resistor. This unused energy now has a valuable potential. Using a regenerative unit the generated energy can be feedback in the DC circuit through the drive or it's possible to feed it back onto the mains power supply line.

COMBIVERT R6 regen units are able to supply and feedback energy of a single inverter or a common DC-link of several drive controllers. The system can also be designed to match the required power by the cascading of several units.

COMBIVERT R6



SAVING ENERGY THROUGH REGENERATION - AN ENVIRONMENTAL CONTRIBUTION THAT PAYS OFF!

PASSENGER AND FREIGHT ELEVATORS

- replacement of traditional braking resistors
- reduced fire hazard of the system
- return on investment through energy savings possible after less than 2 years of operating time

CONNECTION OF GENERATORS TO UTILITY SYSTEM

- power quality standards (e.g.: IEEE-519 / THDi < 8 %) can be met with harmonic filters
 - combustion engines
 - wind energy plants
 - hydropower plants

ECCENTRIC LOADS

- increased efficiency of variable speed drives with changing kinetic and regenerative load cycles

THEATRE TECHNOLOGY

- no heating of resistors
- energy optimization
- low-noise braking operation

LIFTING AND CONVEYOR / STORAGE RETRIEVAL SYSTEMS

- DC-interconnected operation of multiple drives support energy sharing
- return of peak energy into the mains line power supply
- no additional heat sources

TEST BENCHES AND TEST SYSTEMS

- permanent regeneration of energy
- can be cascaded for large loads

CENTRIFUGES

- regenerative braking of high centrifugal masses
- utilization of kinetic energy
- increased productivity due to short start-up and run-down times



BENEFITS


- Easy replacement for braking resistors
- Usable for all common supply voltages of 180 ... 528 V AC, 50/60 Hz
- Compatible with all typical DC - powered drive controller
- Integrated pre-charging circuit
- Compact and lightweight devices
- Wide power range up to 1.000 kVA
- Cascadable power parts
- Optional choke or harmonic filter
- Reduced fire risk in sensitive areas
- Reduced cooling requirements of the environment
- Energy meter for the validated savings
- freely configurable inputs and outputs
- Various field bus interfaces available by operator

COMBIVERT R6 -FUNCTIONALITY




SIMPLIFIED DIAGRAM

WITH COMMUTATION CHOKE

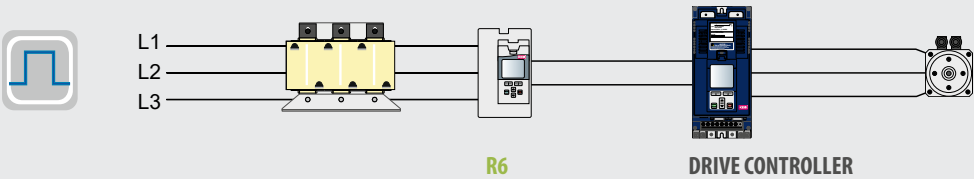

With COMBILINE harmonic filters the R6 - System generates sinusoidal current at the mains line power supply.

WITH HARMONIC FILTER

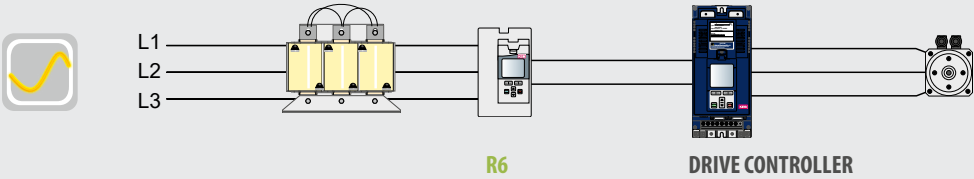

The COMBIVERT R6 can regenerate energy from drive controllers back onto the mains power supply line. This can be from a single drive controller or from a common DC-link of several inverters.


In supply mode the COMBIVERT R6 pre-charges the DC-link and acts like a typical B6 rectifier. The DC-link voltage corresponds to the rectified AC supply voltage.

When the energy fed into the DC-link by one or several drives in a deceleration or braking operation the regen unit will feed this excess energy back to the mains power supply line enabling access to this energy by other consumers on the grid

Depending on the system design either standard chokes or harmonic filters can be used to improve the THDi (lower harmonics).

With standard COMBILINE mains chokes all industrial requirements are fulfilled (block shaped regeneration). Using the COMBILINE harmonic filters will result in nearby sinusoidal current waveform for supplying and regenerating energy (THDi typ. < 8%)

VOLTAGE / CURRENT DIAGRAM FOR REGENERATIVE OPERATION WITH R6-NCM

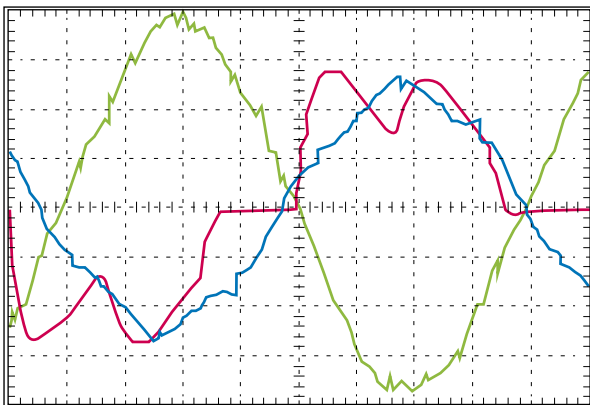

Voltage
Current with harmonic filter
Current with mains filter

Next to the established control version R6-S the modulation scheme was improved with the “**Natural Current Modulation**”. This new R6-NCM technology is available with the new control Type, called “N-version”

The **Natural Current Modulation** principle emulates the current waveform of a typical B6 rectifier system also in regeneration mode. This results in a much smoother commutation and an additional synchronization module (as used with R6-S) is no longer required.



THE ESSENTIALLY ADVANTAGES OF R6-NCM

- Reduced noise level in regen mode
- Improved current waveforms (reduced THDi values)
- Standard mains chokes and patented harmonic filters of the KEB COMBILINE Z1 series can be used
- No additional synchronization unit needed

Supply and Regenerative Systems

ARTICLE CODE	15R6_1E-900A	19R6_1E-900A	19R6_1E-910A	25R6S3R-900A	29R6S1P-910D
Control version	N / S	N / S	N / S	S	S
Housing size	E			R	P
Phases	3				
Rated voltage [V]	400			400	
Mains voltage range [V]	180 ... 550 +0 %			305 ... 528 +0 %	
Mains frequency [Hz]	50 / 60				

REGENERATIVE OPERATION

Output rated power [kVA]	18	45	153	346
Rated active power [kW]	17	42	140	330
Max. power output [kVA]	27	67.5	81	230
Max. active power [kW]	25.5	63	75	210
Regenerative rated current [A]	26	65	221	500
Regenerative DC current [A _{DC}]	32	80	270	590
Over load current (E.O.L) 60 s [A]	39	97.5	117 [10 s]	331
Max. regenerative DC current 60 s [A _{DC}]	48	120	144 [10 s]	405

POWER SUPPLY OPERATION

Input rated power [kVA]	18	48.5	153	336
Rated active power [kW]	16	44.5	135	310
Max. input power [kVA]	27	72.5	87 [10 s]	230
Max. active power [kW]	24	67	80 [10 s]	202
Rated supply current [A]	26	70	221	485
DC supply current [ADC]	32	87	270	590
Over load current (E.O.L) 60 s [A]	39	105	126 [10 s]	331
Max. DC supply current 60 s [A _{DC}]	48	130	156 [10 s]	405
Overload disconnection [%]	160	160	200	160
DC-fuse internal	optional		-	internal
Dimensions (A x B x C) [mm]	130 x 290 x 208			340 x 520 x 357
Weight [kg]	5.6			25

Assignment of filters and chokes / hamonic filter

	SIZE	15R6	19R6	19R6	25R6	29R6
COMBIVERT R6-N	max. over load	160 %	160 %	200 %	160 %	160 %
	EMC filter	16E6T60-3000	20E6T60-3000	20E6T60-3000	25E4T60-1001	30E4T60-1001
	Choke	15Z1B04-1000	19Z1B04-1000	20Z1B04-1000	25Z1B04-1000	29Z1B04-1000
	Harmonic filter *	15Z1C04-1000	19Z1C04-1000	19Z1C04-1000	25Z1C04-1000	29Z1C04-1000
COMBIVERT R6-S	EMC filter	15E4T60-1001	19R6T60-1001		25E4T60-1001	30E4T60-1001
	Choke	15Z1B05-1000	19Z1B05-1000	19Z1B05-1011	25Z1B04-1000	29Z1B04-1000
	Harmonic filter *	15Z1C04-1002	19Z1C04-1002		25Z1C04-1000	29Z1C04-1000
	Synchronisation unit	integrated			00R6940-2407	00R6940-2407
	Synchronisation cable	00F50C3-4010				

* Different Types for 60 Hz mains on request

KEB COMPANIES

Austria | KEB Automation GmbH
Ritzstraße 8 4614 Marchtrenk Austria
Phone: +43 7243 53586-0 Fax: +43 7243 53586-21
E-Mail: info@keb.at Web: keb-automation.com

Benelux | KEB Automation KG
Boulevard Paepsem 20 – Paepsem laan 20 1070 Anderlecht Belgium
Phone: +32 2 447 8580
E-Mail: info.benelux@keb.de Web: keb-automation.com

Canada | KEB Canada
2010 Winston Park Dr., Suite 200 Oakville, ON L6H 5R7 Canada
Phone: +1 905 617 2352
E-Mail: sales@keb-automation.ca Web: keb-automation.ca

Czech Republic | KEB Automation s.r.o.
Videnska 188/119d 61900 Brno Czech Republic
Phone: +420 544 212 008
E-Mail: info@keb.cz Web: keb-automation.com

France | Société Française KEB SASU
Z.I. de la Croix St. Nicolas 14, rue Gustave Eiffel
94510 La Queue en Brie France
Phone: +33 149620101 Fax: +33 145767495
E-Mail: info@keb.fr Web: keb-automation.com

Germany | Geared Motors
KEB Antriebstechnik GmbH
Wildbacher Straße 5 08289 Schneeberg Germany
Phone: +49 3772 67-0 Fax +49 3772 67-281
E-Mail: info@keb-drive.de Web: keb-automation.com

Germany | Headquarters
KEB Automation KG
Südstraße 38 32683 Barntrup Germany
Phone: +49 5263 401-0
E-Mail: info@keb.de Web: keb-automation.com

Italy | KEB Italia S.r.l. Unipersonale
Via Newton, 2 20019 Settimo Milanese (Milano) Italy
Phone: +39 02 3353531 Fax: +39 02 33500790
E-Mail: info@keb.it Web: https://blog.keb.it

Japan | KEB Japan Ltd.
711-103 Fukudayama, Fukuda,
Shinjo-shi Yamagata 996-0053 Japan
Phone: +81 233 292800 Fax: +81 233 292802
E-Mail: info@keb.jp Web: keb.jp

P. R. China | KEB Power Transmission Technology (Shanghai) Co. Ltd.
No. 435 QianPu Road Chedun Town Songjiang District
201611 Shanghai P. R. China
Phone: +86 21 37746688 Fax: +86 21 37746600
E-Mail: info@keb.cn Web: keb.cn

Poland | KEB Automation KG
Phone: +48 604 077 727
E-Mail: roman.trinczek@keb.de Web: keb-automation.com

Republic of Korea | KEB Automation KG
Room 1112, Hanju 4th 501 Pyeonghwa-ro 322beon-gil
Uijeongbu-si 11706 Gyeonggi-do Republik Korea
Phone: +82 10 3101 3902
E-Mail: vb.korea@keb.de Web: keb-automation.com

Spain | KEB Automation KG
c / Mitjer, Nave 8 - Pol. Ind. LA MASIA
08798 Sant Cugat Sesgarrigues (Barcelona) Spain
Phone: +34 93 8970268
E-Mail: vb.espana@keb.de Web: keb-automation.com

Switzerland | KEB Automation AG
Barzloostrasse 1 8330 Pfaeffikon/ZH Switzerland
Phone: +41 43 2886060
E-Mail: info@keb.ch Web: keb-automation.com

United Kingdom | KEB (UK) Ltd.
5 Morris Close Park Farm Industrial Estate
Wellingborough, Northants, NN8 6XF United Kingdom
Phone: +44 1933 402220 Fax: +44 1933 400724
E-Mail: info@keb.co.uk Web: keb-automation.com

United States | KEB America, Inc.
5100 Valley Industrial Blvd. South
Shakopee, MN 55379 United States
Phone: +1 952 2241400 Fax: +1 952 2241499
E-Mail: info@kebamerica.com Web: kebamerica.com



KEB'S GLOBAL PARTNER NETWORK





The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. We reserve the right to make technical changes.

© KEB 000000051R6 12.2018

Automation with Drive

keb-automation.com

KEB Automation KG Südstrasse 38 32683 Barntrop Germany Phone +49 5263 401-0 E-Mail: info@keb.de